



CM1400 offers 5 types of chime and 2 siren tones, which can be connected to MX2222 chime input or directly to power amplifiers.

Tone activation shall be by the front panel switches or via the remote trigger port available at the rear panel. This enable the unit to be linked to external sensors or triggering point such as alarm panel, remote paging microphone or emergency switch.


Siren activation shall have priority over other chime tones.



Customisation of chime is available upon request.



Schematic Diagram

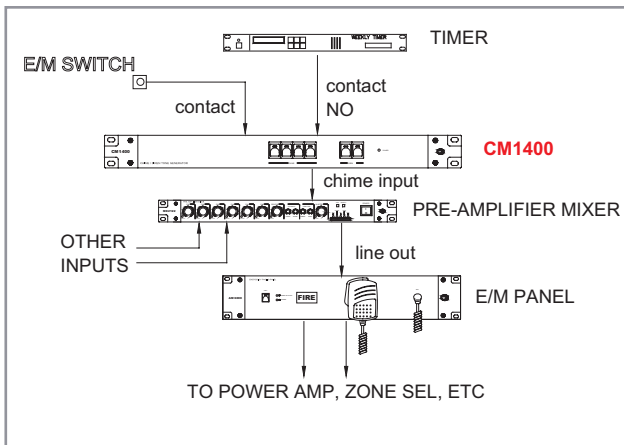


Features

- 5 types of chimes and 2 siren
- Adjustable output volume
- Front panel switch activation or via remote trigger port

Specifications

Operating voltage	24V DC ; 0.5 A
Power consumption	0.3 A
Chime type	4 tone up, 4 tone down, 2 tone Ringing bell, Westminster
Siren type	Constant siren 8 KHz Wavy siren
External activation	Dry contact
Output	Line 1 V
Output impedance	10 K Ohm, balanced / unbalanced selectable
Gain	+4 dB max
Dimensions (WxHxD)	482 x 44 x 90 mm
Weight (kg)	1.6 kg



REAR VIEW

packing information

Qty per carton : 1 unit
 W x H x D : 540 X 105 X 270 mm
 Weight : 2.1 kg