

Video Conference Indirect Wash Fluorescent Fixture

Lutron® Video Conference Indirect Wash Fixtures provide a combination of horizontal and asymmetrical vertical illumination for optimal video conference lighting. The unique reflector design of this fluorescent luminaire creates even, glare-free light distribution for participants in a video conference and for presenters in a distance learning environment.

Features

- Universal input voltage 120/277 V~
- Excellent for spaces where indirect, balanced lighting is desired, but ceiling heights are too low for suspended luminaires
- Lutron® Hi-Lume® 1% dimming ballast included, enabling adjustment of light levels for optimum image quality
- Models available for installation in standard 2 x 2 ft or 1 x 2 ft T-bar grid ceilings, drywall ceilings and surface mount applications and diagonal mount for T-bar grid ceilings
- Uses 50 W T5 twin-tube compact fluorescent lamps
- Optional Emergency Ballast available



2 x 2 ft Fixture



1 x 2 ft Fixture




45° 1 x 2 ft Fixture

Models Available

For a complete list of available model numbers, please see the **Ordering Guide** on page 3.

Configuration:

FXVTIW _ _ _ 50UHD _ _ WH

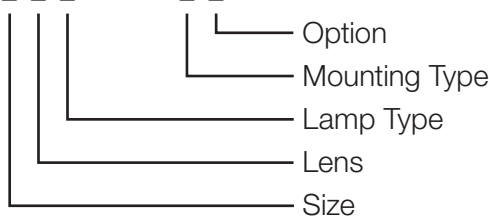

Job Name:	Model Numbers:
Job Number:	