



PRODUCT DRAWING

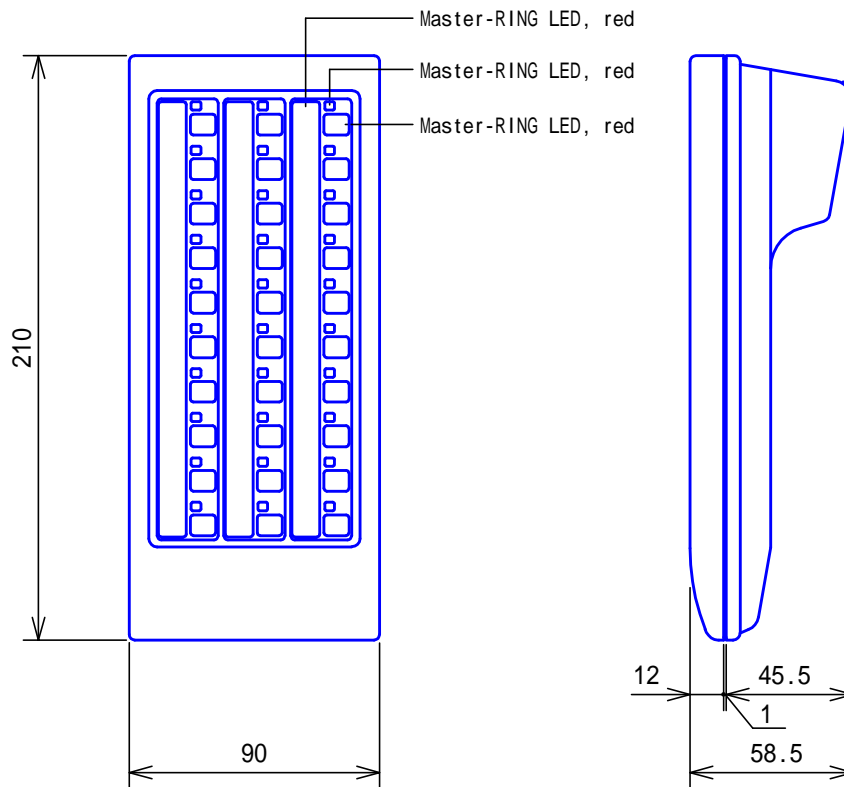

MOUNTING

NHX-30G is solely used on desk-top, joined together with NHX-50M Master console station

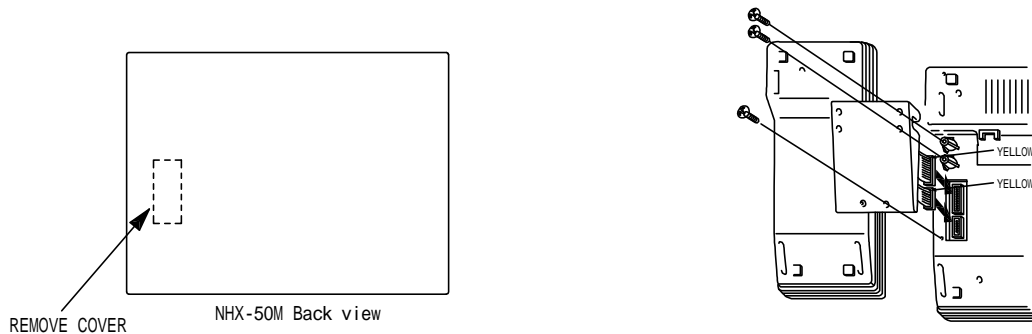


SPECIFICATIONS

Mounting	Desk-top use. On back of NHX-50M, remove the cover located on the left side. There are mounted two jacks, to which plug two connectors of NHX-30G (with each yellow lead atop), and tighten 3 screws, connecting two units together.		
Station capacity	30 Sub stations.		
Remarks	To add NHX-30G, install NHR-30K, 30-station Expansion card inside the CCU NHX-80X.		
DESCRIPTION 30-CALL ADD-ON SELECTOR	FIG. NAME PRODUCT/SPEC./FCN.	UNIT mm	DATE 24 May, 2005
MODEL NO. NHX-30G	FIG.NO. 05403301-1-2	PAGE 1/2	REVISION 1

AIPHONE

Mounting NHR-30K Expansion Card (on NHX-80X CCU)

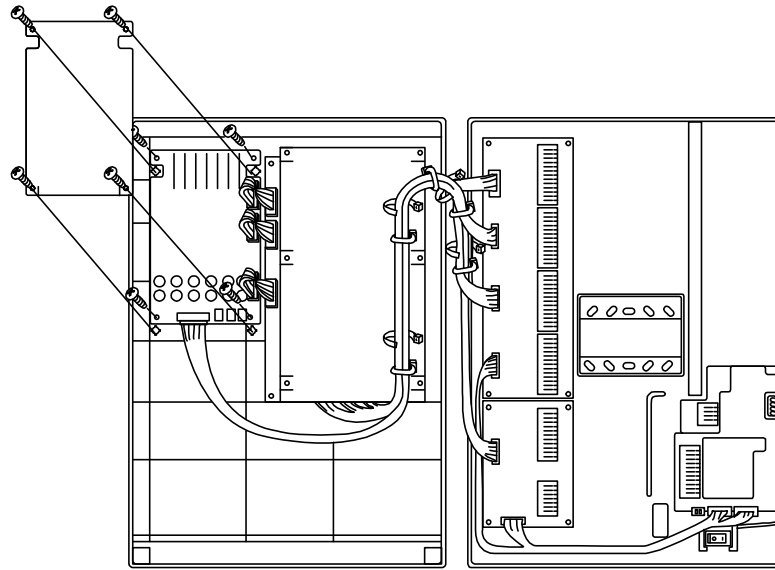

NHX-80X front cover (inside) NHX-80X back case (inside)

1. On inside NHX-80X front cover, mount XC-461 Card in place with 4 screws (supplied), putting White insulation cover on top.
2. Plug 3 connectors into CN4, CN5 & CN-6 sockets on Main PC Card (w/Yellow lead atop).
3. From CN201, plug into CN201 jack located on inside the back case.
To avoid pinching, tie up CN201 wires with Main PC Card's wires in a bundle with wire-bands (total 4 supplied).
4. Attach White insulation cover over the XC-461 Card with 4 screws (supplied).

FUNCTIONS

Adding 30 Sub stations, allowing system expansion to max. 80 Sub stations.

SETTING

After completing installation of NHX-30G & NHR-30K, turn NHX-80X Power switch on. Continuously proceed programming NHX-80X for additional Sub stations.

DESCRIPTION 30-CALL ADD-ON SELECTOR	FIG. NAME PRODUCT/FCN./SETTING	UNIT mm	DATE 23 May, 2005
MODEL NO. NHX-30G	FIG.NO. 05403301-2-2	PAGE 2/2	REVISION 1
			AIPHONE