

Video Conference Indirect Wash LED Fixture

Lutron® Video Conference Indirect Wash LED Fixtures provide a combination of horizontal and asymmetrical vertical illumination for optimal video conference lighting. The unique reflector design of this LED luminaire creates even, glare-free light distribution for participants in a video conference and for presenters in a distance learning environment.

Features

- Universal input voltage 120–277 V~
- Excellent for spaces where indirect, balanced lighting is desired, but ceiling heights are too low for suspended luminaires
- Lutron® Hi-Lume® 1% LED dimming, EcoSystem® digital, and 3-wire dimming driver included, enabling adjustment of light levels for optimum image quality
- Models available for installation in standard 2 ft x 2 ft or 1 ft x 2 ft T-bar grid ceilings, drywall ceilings, surface mount applications, and diagonal mount for T-bar grid ceilings
- LED assembly is integrated into the fixture
- Emergency Driver option available



2 ft x 2 ft Fixture



1 ft x 2 ft Fixture




45° 1 ft x 2 ft Fixture

Models Available

For a complete list of available model numbers, please see the **Ordering Guide** on page 3.

Configuration:

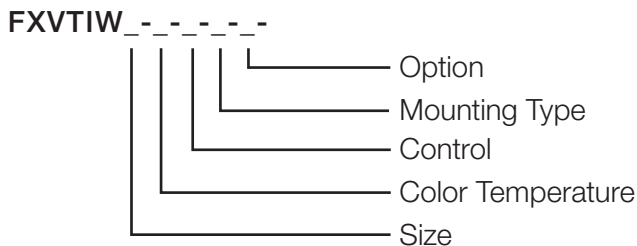

Job Name:	Model Numbers:
Job Number:	