



the emerging preference

PM1000 Series

ANALOGUE PAGING MICROPHONES

inputs and data

VARIANTS

The three variants of analogue paging desk had been serving many installations faithfully since their creation and had been improved further to meet the changing requirements.

PM1000 is used for direct paging without zone selection which can be installed near the rack or at remote location. A dry contact is available upon activation of mic, which can be used to trigger ALL CALL at zone selector, or applied as an emergency or priority mic console.

PM1060 / 1120 has zone selection feature with 6 and 12 zones respectively and is suitable for small scale installation which require remote zone selection for paging.


- PM1000 - Chime Paging Desk
- PM1060 - Chime With 6 Zones
- PM1120 - Chime With 12 Zones



Features

- Condenser gooseneck mic with illuminated ring
- Pre and post announcement 4 tone chime
- Adjustable chime and mic volume with balanced mic / line output level
- Output level selection to mic or line to suit input type of mixer
- Dry contact available when mic is active (PM1000 only)
- 6 or 12 zone selection for PM1060 and PM1120

Schematic Diagram

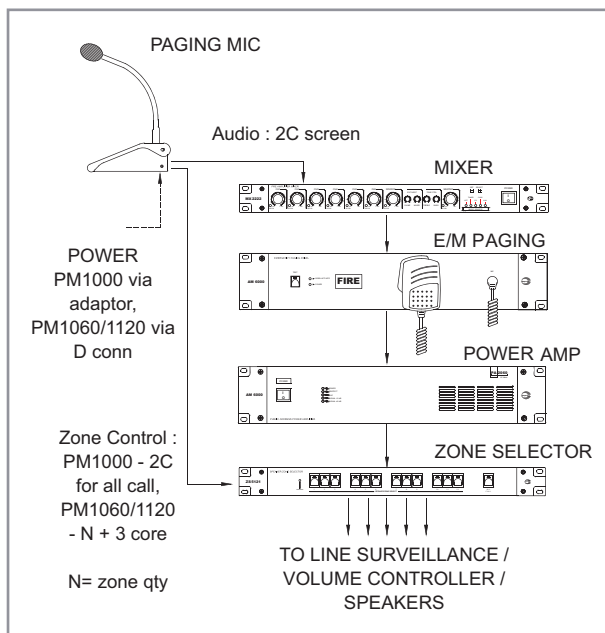


Specifications

Power requirement	PM1000 : 24V DC adaptor PM1060 / 1120 : 24V DC via D9 conn.
Pwr consumption	50 mA / 150 mA / 150 mA
Zone selection	PM1000 - ALL CALL PM1060 / 1120 - 6 and 12 zones w ALL CALL
Microphone	Condenser mic ; cardioid
Output impedance	600 Ohm
Output level	1.2 V (line output) / balanced mic (775 mV)
Output dry contact	3 A normally open (PM1000 only)
Output controls	Chime and mic level
Audio connection	1/4 " stereo phone jack
Switching connection	D15 connector (PM1060 / 1120 only)
Operating distance	300 m (recommended)
Chime	4 tone up and 4 tone down
Indicators	Mic ring, zone switch, ALL CALL
Frequency response	100 ~ 12 KHz (+/- 3dB ; 0 dB out)
S / N ratio	> 60 dB
Gooseneck mic length	440 mm
Dimensions (WxHxD)	150 x 62 x 186 mm
Weight (kg)	750 / 760 / 780 gms

packing information

- Qty per carton : 1 unit
- W x H x D : 525 x 85 x 270 mm
- Weight : PM 1000 - 1.5 kg (incl adaptor)
- : PM 1060 - 1.13 kg
- : PM1120 - 1.15 kg



rear view of PM1060 / PM1120