



The 4" Finiré® family

Finiré 4" LED recessed lighting comes standard with Lutron smooth 1% dimming while guaranteeing Lutron control compatibility.

4" Fixture Types and Options



Finiré® eliminates guesswork by ensuring 100% compatibility between LED fixtures, drivers, and controls. Available in 17W-35W models — all delivering smooth, flicker-free dimming. This complete solution combines an architectural grade fixture with high-performance Hi-lume® LED drivers designed to work with Lutron dimmers/controls.

Fixture Types and Options

Type

Downlight, Wall Wash, Adjustable

Size (opening)

4"

Housing

Non-IC, IC

Aperture Style

Round, Square

LED Type

17W, 700lm, 97 CRI, R9=95
 20W, 850lm, 97 CRI, R9=95
 18W, 1000lm, 83 CRI, R9=14
 35W, 2000lm, 83 CRI, R9=14 (Non-IC only)

Color Temperature

2700K, 3000K, 3500K

Beam Spread

20°, 30°, 36°, 40°, 50°

Trim

Round Trimmed, Round Trimless
 Square Trimmed, Square Trimless

Hanging

14–24" Adjustable Hanging Bars

Control Method

2-Wire, 120V~
 3-Wire, 120–277V~
 EcoSystem*, 120–277V~
 * EcoSystem comes standard with Soft-on, Fade-to-Black™ dimming feature

Ceiling Thickness

Standard, 1", 1.5", 2"



4" Specifications

LED Performance



Finiré® Model	1A	2A	2S	3S
CRI (Typical)	97, R9=95	97, R9=95	83, R9=14	83, R9=14
Lumens (Delivered)	700	850	1000	2000
Wattage	17	20	18	35
Efficacy (Lumens/Watt)	41	43	56	57

Independent measurement of typical 3000K downlight fixture models by Lutron Electronics Co., Inc. for reference only. Go to the Finiré specification sheets for LM79 photometric data by fixture type and trim options.

IC Housing

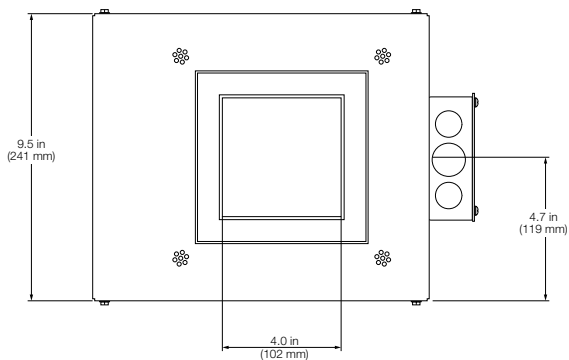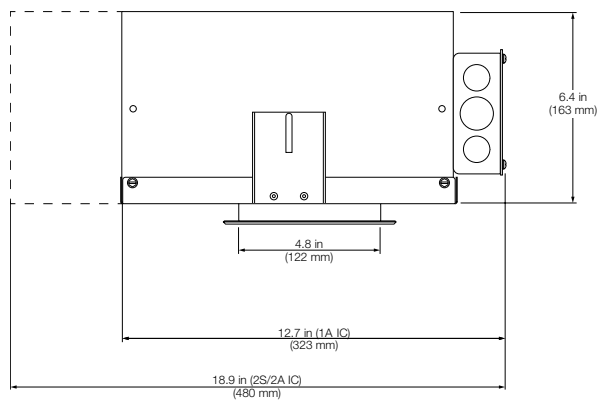

Non-IC Housing

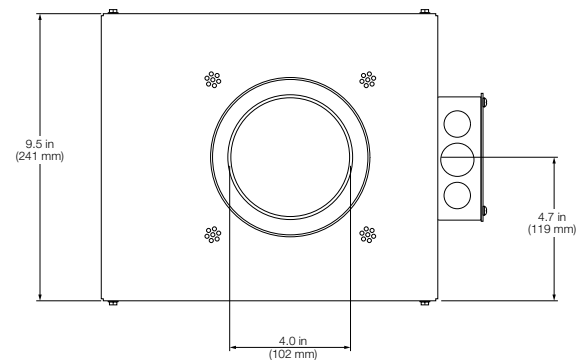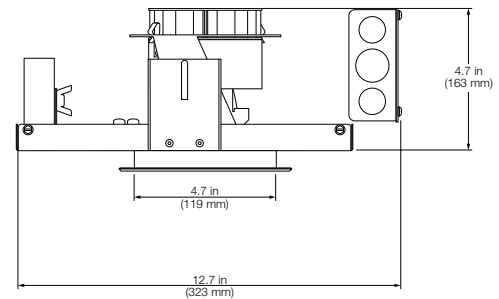

Dimensions

- 1A IC Housing:** 12.7"L x 9.5"W x 6.4"H
- 2S, 2A, IC Housing:** 18.9"L x 9.5"W x 6.4"H
- Non-IC Housing:** 12.7"L x 9.5"W x 4.7"H
- Max Ceiling Thickness:** 2.0"

Compatible Controls

For a list of compatible controls, visit www.lutron.com/finire or contact the LED Control Center of Excellence at leds@lutron.com/1.877.DIM.LED8.

For spray foam insulation applications, contact fixtures@lutron.com for details.


4" Options

Trim Options

Square Trimmed Downlight/Adjustable	Square Trimmed Wall Wash	Square Trimless Downlight/Adjustable	Round Trimmed Wall Wash/Adjustable	Round Trimmed Downlight	Round Trimless Downlight
					

Shown in: Matte White Matte Black Stainless Bronze Clear Alzak Wheat Alzak




Color Options

	Matte White	Matte Black	Stainless	Bronze	Clear Alzak	Wheat Alzak
						
Round	•	•	•	•	•	•
Square	•	•	•	•		
Pinhole	•	•	•	•		

Decorative & Pinhole Trim Options

Square Frosted Glass Ring	Round Center Frosted Glass	Square Pinhole Downlight	Round Pinhole Downlight	Round Pinhole (Slotted) Adjustable
				

Lens Options

Micro Prism Solite™	Frosted Glass	Clear Glass
		

How to specify 4" Finiré® LED Recessed Lighting

F D T 4 R N 1A 27 40 F1 B2 XX - R4466 MW SO WL
1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16

Fixture Options

- 1 Family**
F = Finiré Recessed Lights

- 2 Type**
D = Downlight
W = Wall Wash
A = Adjustable

- 3 Flange**
T = Trimmed
Z = Trimless

- 4 Size**
4 = 4" Series

- 5 Aperture**
R = Round
S = Square

- 6 Housing**
N = Non-insulation Contact (Non-IC)
I = Insulation Contact (IC)

- 7 LED Type**
1A = 17W, 700lm, 97 CRI
2S = 18W, 1000lm, 83 CRI
2A = 20W, 850lm, 97 CRI
3S² = 35W, 2000lm, 83 CRI

- 8 Color Temperature**
27 = 2700K
30 = 3000K
35 = 3500K

- 9 Beam Spread**
20* = 20°
30 = 30°
36³ = 36°
40 = 40°
50 = 50°

- 10 Control Method**
F1 = Hi-lume 1% 2-wire 120V~
31 = Hi-lume 1% 3-wire 120V~
37 = Hi-lume 1% 3-wire 277V~
E1⁴ = Hi-lume 1% EcoSystem 120V~
E7⁴ = Hi-lume 1% EcoSystem 277V~

- 11 Hanging**
B2 = 14–24" Adjustable Hanging Bars

- 12 Ceiling Thickness**
XX = Standard
10 = 1.0"
15 = 1.5"
20 = 2.0"

Trim Options

- 13 Trim**
R4466 = Round Downlight
R4966 = Round Wall Wash
R4500 = Round Adjustable
R4105 = Round Pinhole Downlight
R4106 = Round Pinhole Adjustable
R04A4 = Square Downlight
R0104 = Square Wall Wash
R0204 = Square Adjustable
R4004 = Square Pinhole Downlight
Z4466 = Trimless Round Downlight
Z4966 = Trimless Round Wall Wash
Z4500 = Trimless Round Adjustable
Z04A4 = Trimless Square Downlight
Z0104 = Trimless Square Wall Wash
Z0204 = Trimless Square Adjustable

- 14 Finish**
MW = Matte White
BL = Matte Black
SG = Stainless
RB = Bronze
CL[†] = Clear Alzak
WE[†] = Wheat Alzak

- 15 Lens**
FG = Frosted Glass
SO = Micro Prism Solite™
CG = Clear Glass

- 16 Options**
XX = None
WL = Wet (damp) Location (interior only)
TF = Round Center Frosted Glass
FQ = Square Frosted Glass Ring

Need quote, layout, or custom assistance?
Email fixtures@lutron.com or call 610.282.7472.

For details on Energy Star or CEC Title 24 compliant options, please contact fixtures@lutron.com.

* Adjustables only
† Round only
² Non-IC only
³ 2S, and 3S LED types only
⁴ includes Soft-on, Fade-to-Black dimming