



Wide and Zoom & PanTilt Hands-free Color Video Intercom




GT-2C-L/GT-2C

Features

- One door & four monitors (3-1/2 inch); room to room communication is available
- Vandal resistant video door stations are available
- Total hands-free communication, auto-voice actuation
- "Talk" LED lights in red while speaking
- Visual monitoring with audio

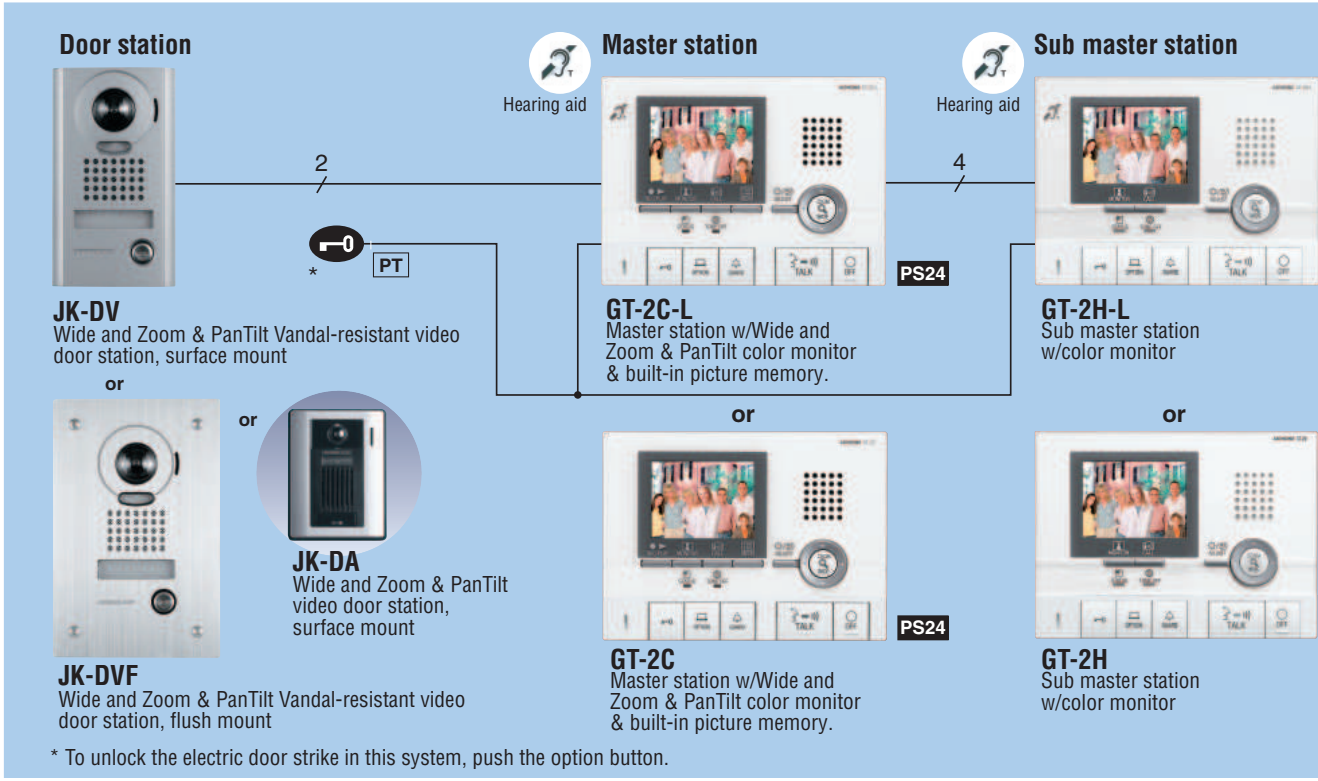


Communication network

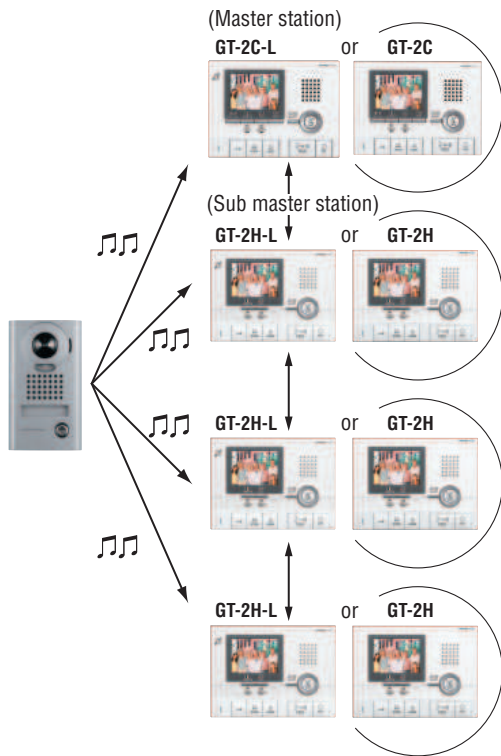

The design and specifications are subject to change without notice for improvement.

Wiring

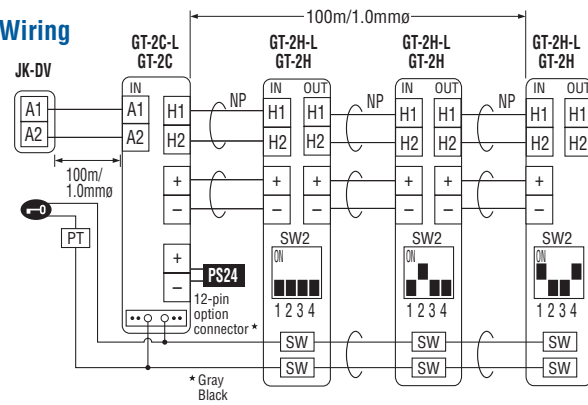


PANORAMIC WIDE View

Everyone at the entrance can be identified by image from wide angle camera. The field of vision can be controlled on Wide mode or Zoom mode from inside.




Zoom & PanTilt

By pressing PanTilt button, the image of the PanTilt video door station can be adjusted to a more visible position from inside on the Zoom mode.

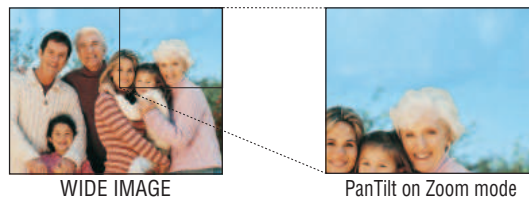


*The screen images are simulated graphics. They are images to express functions, and are different from the real one. Please understand it beforehand.

- Built-in picture memory; Record visitor both automatically & manually
- Press-to-talk operation available
- White LED illumination turns on in low-light conditions
- Backlight compensation by "ADJUST" button
- Full color video in low light situations w/o external illumination
- PanTilt and Zoom & Wide camera control
- Camera angle preset

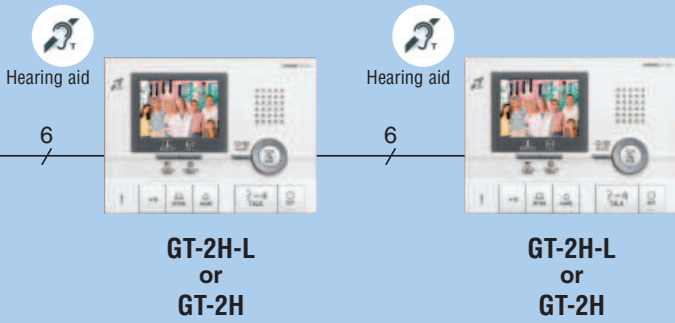

Color variation

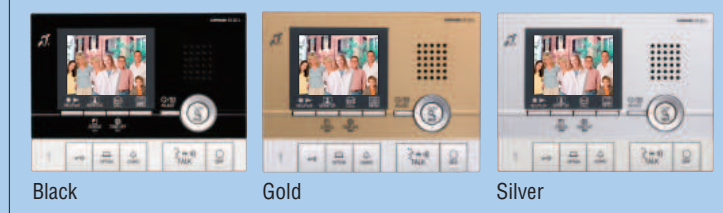

Power supply

PS-2420S PS-2420UL → P.108

Lineup



AC-10S
Access control keypad, surface mount
→ P.103

AC-10F
Access control keypad, flush mount
→ P.103

JK-DVF-AC
Vandal-resistant color video door station with access control keypad




AE7090210B
AE7090210G
AIPHONE approved product wire
→ P.108



GT-HS
Optional Handset

Unit dimensions

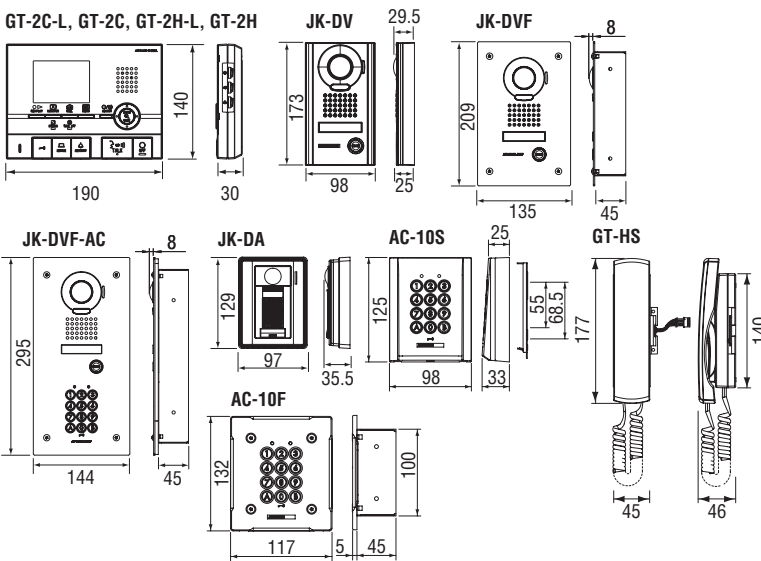


Specifications

Power source	24V DC
Power supply	PS-2420S, PS-2420UL
Consumption	Max. 390mA (GT-2C-L). Max. 260mA (GT-2C). Max. 240mA (GT-2H-L). Max. 110mA (GT-2H).
Calling	Chime & Image approx. 45 sec.
Communication	Approx. 1 min. AUTOMATIC (Hands-free); To activate, momentarily press TALK button. MANUAL (Press-to-talk/Release-to-listen); To activate, press TALK button for 1 sec. or more.
Video monitor	3.5 inch TFT color LCD.
Night viewing	Up to 50cm from camera, with white LED projected, background beyond 50cm cannot be seen.
Option output	24V AC/DC, 1A
Wiring	Door to master: 2-cond., mid cap, non-shielded. Master to sub: 2 x 2-cond., mid cap, non-shielded.
Wire type	AIPHONE approved product wire: AE7090220B, AE7090220G, AE7090210B, AE7090210G
Wiring distance	Master to door: 50m (0.65mm ϕ) 100m (1.0mm ϕ) Master to farthest sub: 50m (0.65mm ϕ) 100m (1.0mm ϕ)


Image view area

JK-DA, JK-DV, JK-DVF



(WIDE)

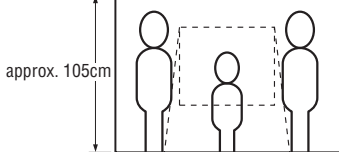

(WIDE)

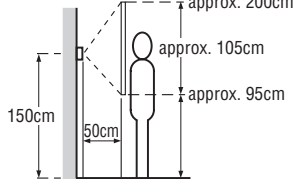

(ZOOM)



(ZOOM & PanTilt)

