



PRODUCT DRAWING

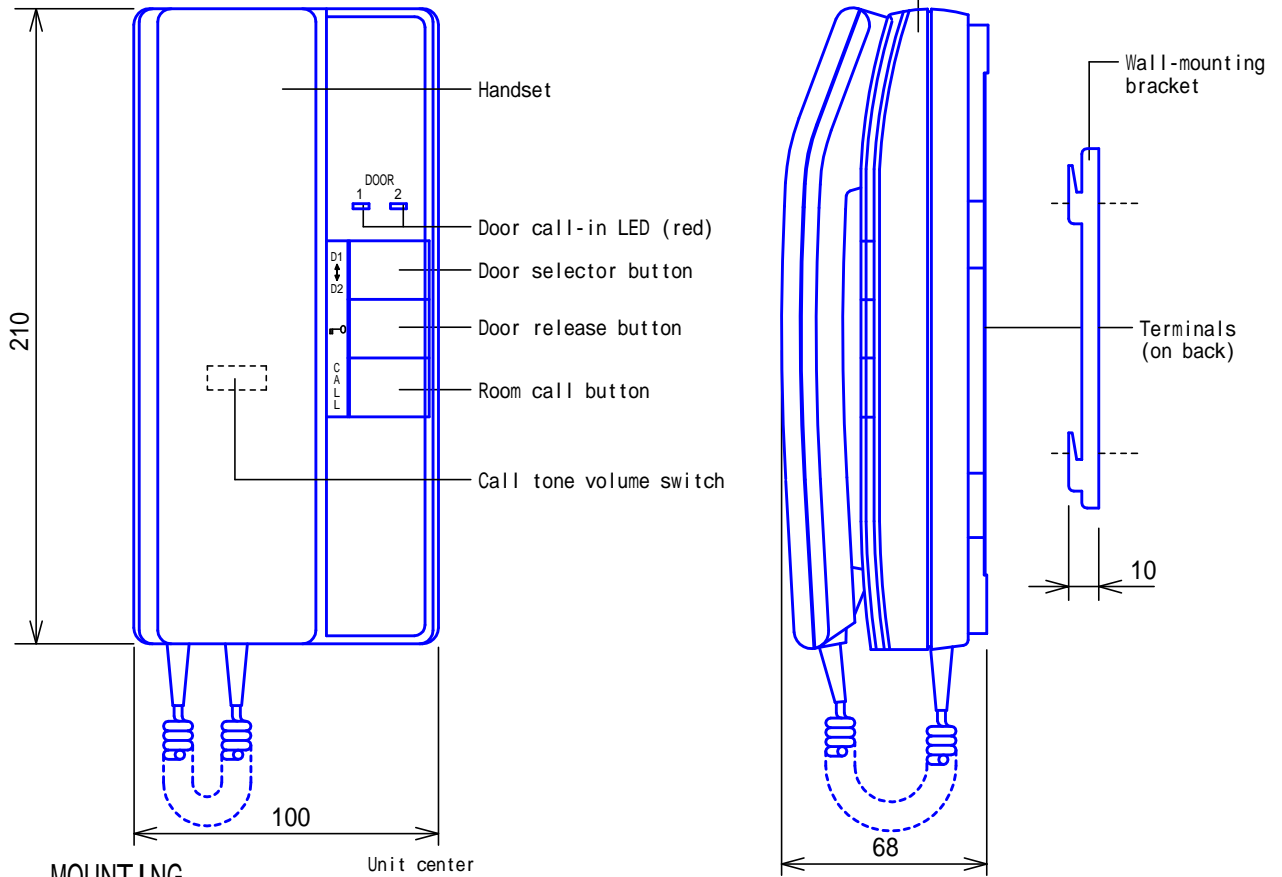

MOUNTING

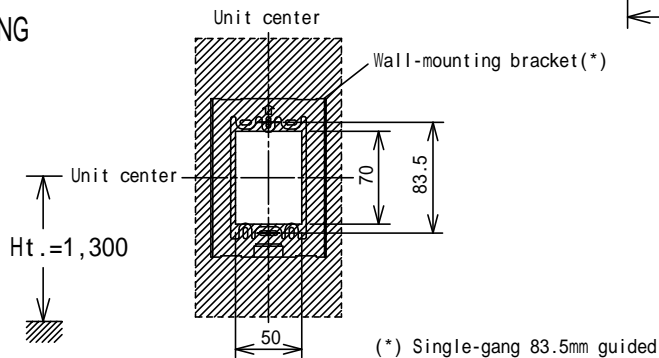


SPECIFICATIONS

Power source	12 ~ 24V DC. 12 ~ 16V AC.
Current consumption	200mA(12 ~ 24V DC). 200mA(12 ~ 16V AC).
Type of communication	Handset simultaneous communication
Call tone	Door station 1; 4-tone chime. Door station 2; 2-tone chime. Room stations; Mono tone.
Door station	2 units
Sub station	2 units
Call extension	1 unit
Mounting	Wall-mouting
Electrical box	Single-gang box
Housing	Fire-retardant ABS plastic
Weight	700g(approx.)
Unit color	Snow white

DESCRIPTION MASTER STATION (Chime tone, 2 doors - 3 rooms)	FIG. NAME PRODUCT/SPECIFICATIONS	UNIT mm	DATE 6 April, 2005
MODEL NO. IE-2AD(U)	FIG.NO. 36722301-1-2	PAGE 1/2	REVISION 1

AIPHONE

WIRING DIAGRAM

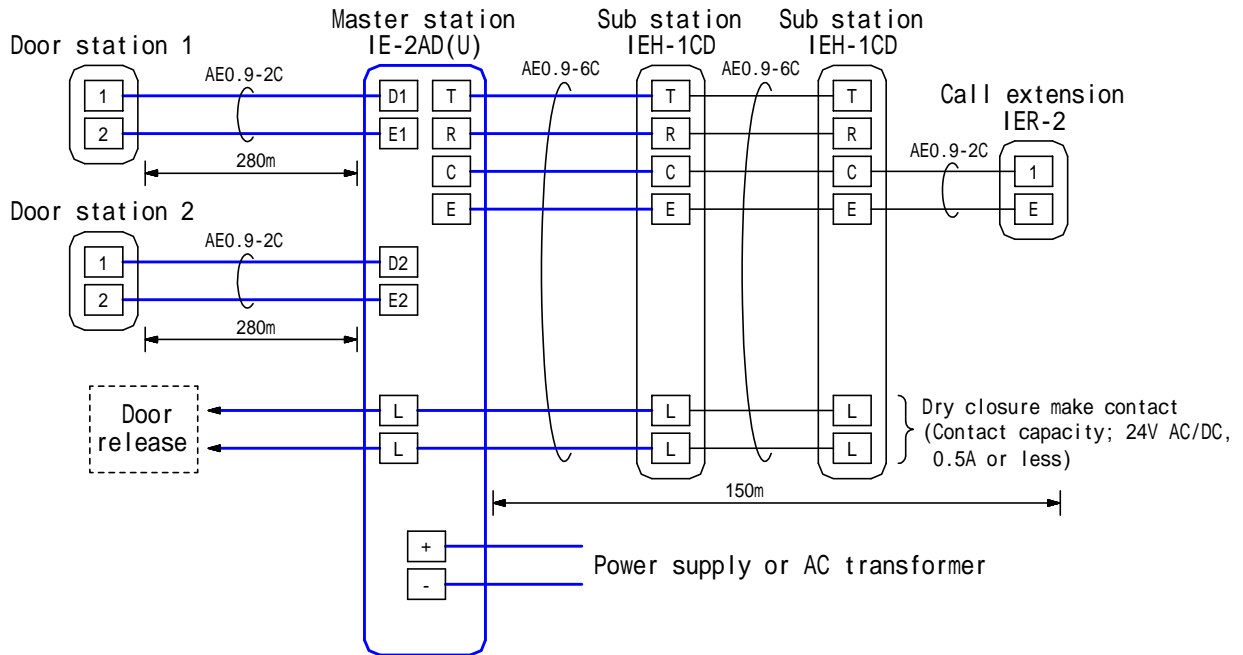

RESTRICTIONS

- IE-2AD(U) is not compatible with existing door station models (IA, IB, IC, ID Series).
- IE-2AD(U) shall not be used on desk-top.
- For internal call, All-Call type calling is available with pre-tone & voice. (Differentiate tone, as it is not selective)

FUNCTIONS

- Receiving a call and communication with door station ("DOOR1, 2" call-in LED is lit)
- Monitoring audio either door by lifting handset and pressing Door selector button
- Calling and communication with other room station, by depressing "ROOM" button
- Having door strike activated by pressing Door release button

SETTING

- Adjusting call tone volume (sliding) with front volume switch

DESCRIPTION	FIG. NAME	UNIT	DATE
(Chime tone, MASTER STATION 2 doors - 3 rooms)	WIRING/RESTR./FCN./SETTING	mm	7 April, 2005
MODEL NO. IE-2AD(U)	FIG.NO. 36722301-2-2	PAGE 2/2	REVISION 1

AIPHONE