



## PRODUCT DRAWING

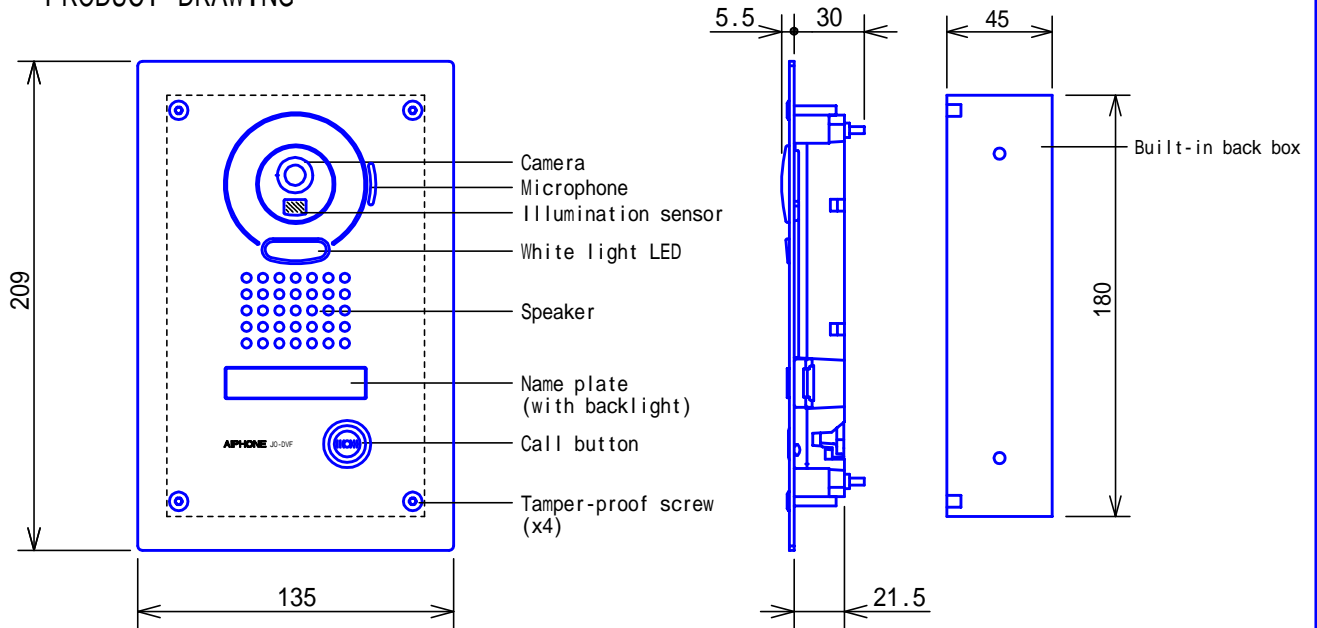


## MOUNTING

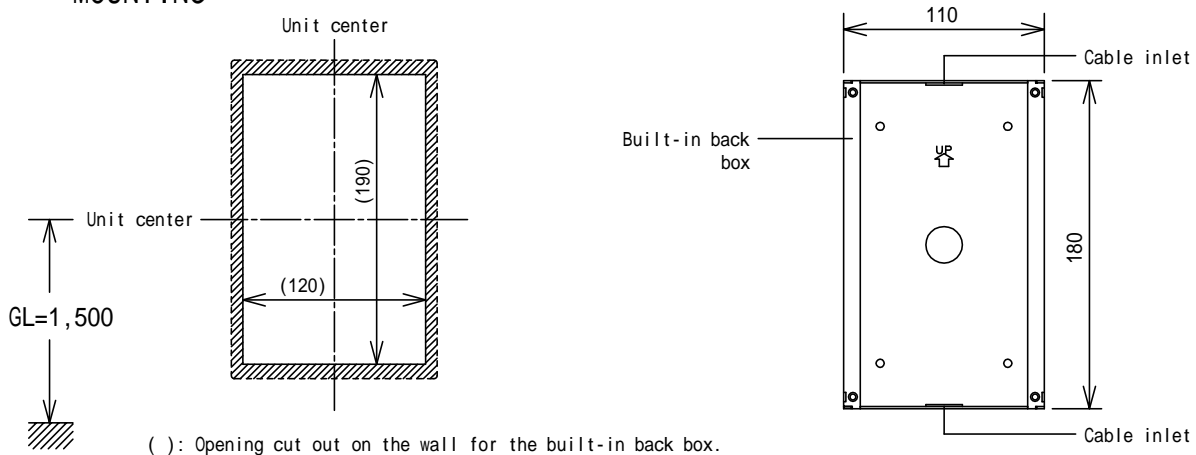

## SPECIFICATIONS

Power source	Supplied from Master monitor station or Expansion monitor station			
Type of communication	Open voice hands-free communication			
Camera	1/4 inch color CMOS			
Minimum illumination	5 lux (approx.)			
Ambient temperature	-20 ~ +60			
Mounting	Flush mount			
Electrical box	Not used (Mounts on built-in back box)			
Material	Front panel: Stainless steel. Main unit: Flame resisting PC + ABS resin			
Weight	580g (approx.) (1.27 lbs)			
Unit color	Front panel: Silver (Stainless steel, vertical hair-line processed.) Back box: Black			
IP rating	IP54			
IK rating	IK07			
DESCRIPTION VIDEO DOOR STATION (Color, Vandal-resistant)	FIG. NAME <b>PRODUCT/SPECIFICATIONS</b>	UNIT mm	DATE 10 June, 2013	
MODEL NO. <b>JO-DVF</b>	FIG.NO. 59295-1-2	PAGE 1/2	REVISION 1	<b>AIPHONE</b>


## WIRING DIAGRAM

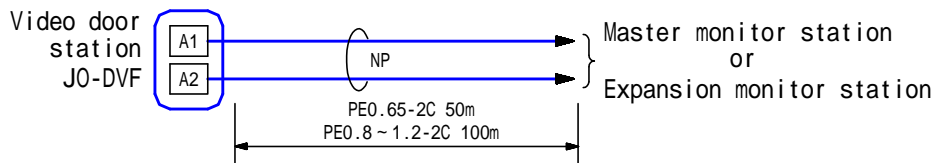


## IMAGE VIEW AREA & MOUNTING HEIGHT

Camera angle straight forward position

Vertical

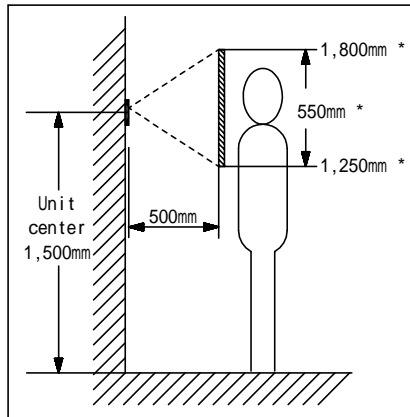


Horizontal




\* The figures are approximate.

## RESTRICTIONS


Do not have rain escape openings on bottom covered with caulking seals.  
 JO-DVF door station is exclusively used for JO Series.  
 Avoid installing JO-DVF door station in the following locations;



At the entrance where background is sky in upper floors of building, etc.



The background of the standing caller's is white wall.



Where the standing location is strongly sunlit.

## FUNCTIONS

Initiating a call to and entering communication with Master monitor station or Expansion monitor station.  
 Name plate is backlit constantly.  
 White light LED turns on during low-light conditions when monitoring and talking status.

DESCRIPTION VIDEO DOOR STATION	(Color, Vandal-resistant)	FIG. NAME WIRING/IMAGE/RESTR./FCN.	UNIT mm	DATE 10 June, 2013
MODEL NO. JO-DVF		FIG.NO. 59295-2-2	PAGE 2/2	REVISION 1
				<b>AIPHONE</b>