



- » Compact call annunciator
- » Displays 4, 8 or 12 character text messages
- » Amber, green and red LED priority indicator lights
- » Mute button

### Annunciator Room Display


The AN-RMD is a small annunciator designed as an in room or staff room display.

It is housed in a "CPS-xx callpoint" size plate and can be fitted together with a Staff Presence "CPS" type call point into a 2 gang plastic surround to form an "in room" annunciator panel that is active only while a staff member is present in the room. The staff presence button can be either a CPS-1SP when used with the CCA-ODL8 controller or a CPS-2MLSP when used with CCG-8 or CCA-8 controllers. This callpoint must be ordered separately.

While enabled the display will show a "\*" in the right hand corner to indicate that it is powered up and ready to display calls. The "NO CALLS" message previously displayed by the AN8-RMD has been removed.

It can also be used on its own as a permanently enabled display such as at a staff station or duty room. Tone sounds are generated by a small speaker which can be muted for 2 minutes by pressing the button. While muted, the button will remain illuminated red. The sounds are an indication of the call priority and mimic those of the CCZ-CS1 and "ANx" series displays. As was the case with the AN8-RMD different tables of sounds can be fitted at the factory to suit different regional standards.

Easy to read messages

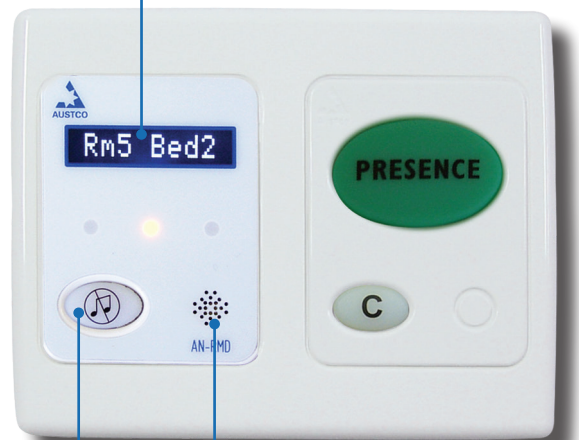

Mute button

Alert tones