

**CL900** | 20 - 60W 100V Line Column Speaker

Features

- ✓ Slim design to match environment or hidden from view
- ✓ Engineered for speech and BGM clarity

Technical Specifications

	CL904	CL908	CL912
Power rating	20W 100V	40W 100V	60W 100V
Speaker components	4 x 2"	8 x 2"	12 x 2"
Transformer tapping(100V)	10 / 20W	30 / 40W	50 / 60W
Primary impedance (Ohm)	1k / 500	330 / 250	200 / 166
Sensitivity (1m / 1w)	87 ± 3dB	88 ± 3dB	89 ± 3dB
Frequency response	230 - 16 KHz		
Dimension (mm)	350 x 79 x 89	567 x 79 x 89	782 x 79 x 89
Material	Aluminum		
Weight with bracket (kg)	1.4	2.35	3.2


Packing information

- CL904 : 390(W) x 150(H) x 230(D) mm  
: 3.60 kg  
: 2 uts per carton
- CL908 : 608(W) x 168(H) x 235(D) mm  
: 5.55 kg  
: 2 uts per carton
- CL912 : 828(W) x 168(H) x 235(D) mm  
: 7.80 kg  
: 2 uts per carton

**CL912** - 60W 100V

**CL908** - 40W 100V

**CL904** - 20W 100V

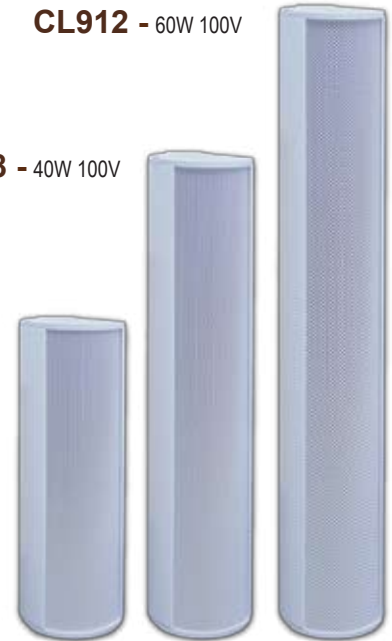

Built ruggedly with aluminum die extrusion housing and available in 3 power rating of 20 / 40 and 60W 100V line with dual power tapping.

Suitable for classrooms, hyper markets, mosques, ballroom, factories, passenger terminals, exhibition areas etc.

20 - 40W 100V Line Column Speaker | **CH700**

**CH700 SERIES COLUMN SPEAKER**

Built ruggedly with aluminum die cast housing and available in 3 power rating of 20 / 30 and 40W 100V line with dual power tapping. Suitable for classrooms, hyper markets, mosques, etc.


Technical Specifications

	CH720	CH730	CH740
<b>SPEAKER</b>			
Power rating	20W 100V	30W 100V	40W 100V
Diameter	2 x 4"	3 x 4"	4 x 4"
Speaker type	Dual cone		
Impedance	8 Ohm		
Freq response (+/- 5dB)	85 ~ 15 KHz	80 ~ 15 KHz	75 ~ 15 KHz
SPL @ 1W / m (+/- 3dB) 1 KHz	91 dB	93 dB	95 dB
Magnet weight	7.5 oz		
<b>TRANSFORMER</b>			
Tapping (100V line)	10 / 20W	15 / 30W	20 / 40W
Primary impedance (Ohm)	1 K / 500	660 / 330	500 / 230
Secondary impedance (Ohm)	8		
<b>PHYSICAL</b>			
Grille / enclosure	Aluminum / metal grille		
Overall size (WxHxD) (mm)	145 x 400 x 100	145 x 495 x 100	145 x 605 x 100
Weight (kg)	3.2	3.7	4.6
Colour	Dark grey / front black grille		

**CH740** - 40W 100V

**CH730** - 30W 100V

**CH720** - 20W 100V

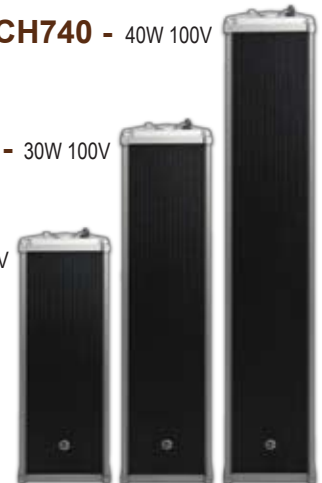

Packing information

- CH720 : 430 (W) x 310 (H) x 220 (D) mm  
: 7.1 kg  
: 2 uts per carton
- CH730 : 520 (W) x 320(H) x 215 (D) mm  
: 8.9 kg  
: 2 uts per carton
- CH740 : 620 (W) x 310 (H) x 220 (D) mm  
: 10.5 kg  
: 2 uts per carton